

Hip & RidgeVent™


NEW
&
IMPROVED

Superior Quality. Superior Value.

For Universal Application to any Screw Down Metal Panels ½" to 1" High.

- 40-Year limited lifetime warranty
- Fits any pitch 2:12-20:12
- One person rollout installation on caps or panels
- Adhesive for holding in place during installation
- Won't crack, dent or rust during shipping or installation
- Won't scratch panel finish
- Won't clog from airborne dust
- Prevents insect and snow infiltration
- Provides proven roof ventilation
- Meets all model building codes
- Almost invisible from the curb
- No waste—use leftovers on next job
- Class A Fire Rating—WILL NOT BURN
- Made in USA
- Made from over 90% recycled fiber; over 30% post-consumer content
- U.S. Patented—US10113760B2

Slits in vent material allows for easier and tighter fit around major rib on metal panels, either hip or straight.

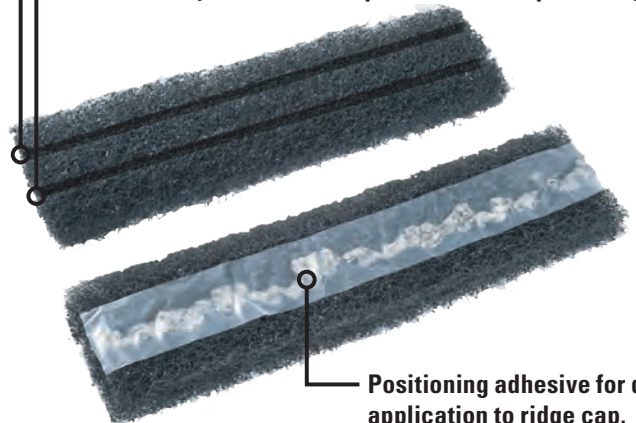


Positioning adhesive for direct application to ridge cap.


Hip & RidgeVent™

Hip&RidgeVent


Installation... Easy as 1, 2, 3



1. Leave an uncut (closed) sheathing area of 6 to 12" at each gable end. Allow 2" opening at ridge for ventilation.



2. Hip & RidgeVent should be installed on the bottom of the ridge cap on ground BEFORE installing on the roof.



3. Screw down or blind rivet the ridge/hip cap according to manufacturer's instructions (works with any ridge/hip cap)

Note: Hip & RidgeVent can be installed on the underneath of the ridge cap before installing on the roof.

Fits 1/2" to 1" panels



Fits 1/2" to 1" panels



Fits 1" to 1 1/2" panels



Hip & RidgeVent Specifications:

Item Description	1" H x 2" W x 10' L
Item #	12052
Rolls per package	2
20 Lineal ft of Hip&RidgeVent per package	2/10' rolls
Package weight	1.0 lbs.
Package size	15" x 15" x 4"
Packages per pallet	90
Lineal ft. per pallet	1,800'

Hip & RidgeVent Specifications:

Item Description	1" H x 3" W x 10' L
Item #	12049
Rolls per package	2
20 Lineal ft of Hip&RidgeVent per package	2/10' rolls
Package weight	1.75 lbs.
Package size	15" x 15" x 6"
Packages per pallet	63
Lineal ft. per pallet	1,260'

Hip & RidgeVent Specifications:

Item Description	1 1/2" H x 3" W x 10' L
Item #	12051
Rolls per package	2
20 Lineal ft of Hip&RidgeVent per package	2/10' rolls
Package weight	2.0 lbs.
Package size	17.5" x 17.5" x 6"
Packages per pallet	42
Lineal ft. per pallet	840'

Property Test Results:

Property

Net Free Area
Air Permeability
Cold Crack
Snow Infiltration
Tensile Strength
Attic Dust
Dust Exposure
Loren
UV Stable
Abrasion

Test

1.20" nom. thickness
ASTM D737
Loren C115
CRL 5704
ASTM D2261-83
ASTM D1739-98
ICBO AC132
Crush Test
Chamber Test
ASTM D1175

Values

23.4 sq. in. per linear foot of Hip&RidgeVent
>>922 cu. ft. per minute
Resistance to > -25 F
0-
Tensile: Machine 17 p.p.i. Counter 25 p.p.i.
No Clogging
No Clogging
Compression 13% Recovery 81.44%
No change to color or materials
No damage to panel surface

Lab test results are based on current ASTM Standards. Test conducted 5/23/14.



Toll Free 833-300-9515
customerservice@profilevent.com

